

we've COOL Got COVERED

SERVE

0

0

S POWER BREEZER

0

1

► SCHEDULE A DEMO ► CALCULATE YOUR COSTS OF HEAT ▶ GET THIS CATALOG

PR

 Heat doubles your cost of labor. - Have you calculated HVAC's negative ROI?

10

The largest portfolio of cooling solutions, and the industry leader in customer service. AVAILABLE THROUGH






Estimated Cost for 100,000 Sq. Ft.



Our commitment to you is simple but unwavering:

We promise to provide a world-class customer experience every time you interact with our team. We guarantee that we will strive to continuously improve our already industry leading customer service, ensuring your Power Breezer units deliver cooling where and when you need it.

Get the information you need, when you need it

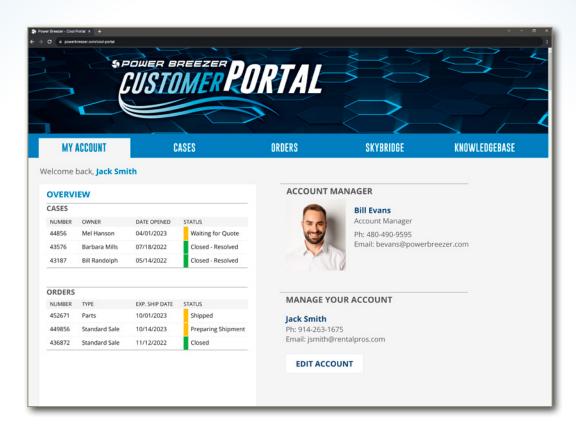

Account snapshot:


- Contact
- Products
- Pricing

- **Customer service:**
- Requests
- History
- Spend

Purchase portal:

- Open orders
- Order history
- New orders

Transparent key Customer Service metrics

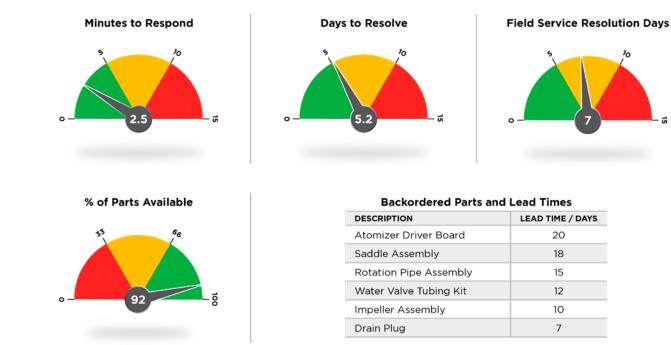

Always ready, always on, customized service programs:

SILVER CARE:

- Free Consumables
- Parts Discounts
- Free Consumables - Parts Discounts

GOLD CARE:

up to a 10% REBATE^{*}

at the time of purchase with a 3 year Gold or Platinum program.

Contact us for more information

customerservice@powerbreezer.com 844.233.5673

*Subject to service area limitations.

VP, Customer Service

DESCRIPTION	LEAD TIME / DAYS
Atomizer Driver Board	20
Saddle Assembly	18
Rotation Pipe Assembly	15
Water Valve Tubing Kit	12
Impeller Assembly	10
Drain Plug	7

- Cleaning and Diagnostics

PLATINUM CARE:


- Free Parts and Labor
- Cleaning and Diagnostics
- Free Consumables



Power Breezer is committed to a program of constant improvement fueled by interaction with our valued customers that drives change in every aspect of our organization. This results in creating the best possible cooling experience for our customers.

VP, Customer Experience

Does this pattern of customer service look familiar?

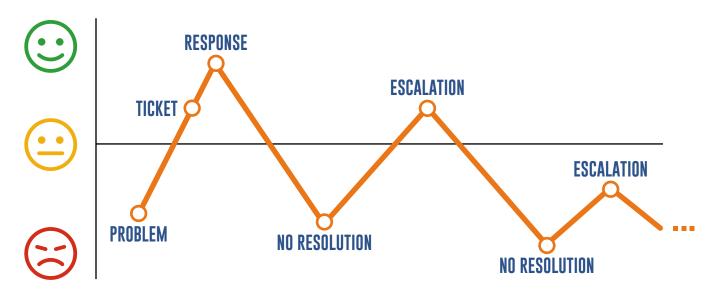

With Power Breezer only you choose who you talk to.



Power Breezer Dedicated Customer Experier You choose how to escalate 100% of new installations surv 100% dissatisfied customers Quarterly customer surveys Customer centric portal Spare parts inventory visibilit Dedicated root cause team Transparent performance me Remote monitoring

SPOWER BREEZER



Industry Standard

nce VP	?
	?
veyed	?
interviewed	?
	?
	?
У	?
	?
trics	?
	?



3 Pieces:

25.2"H x 11.4"W x 3.9"D

works with E520M Units



ORDER YOURS **TODAY!**

GRAINGER.COM^{*} 1.800.GRAINGER







819RX9 works with E1220SL Units 3 Pieces: 44.9"H x 18.9"W x 5.9"D

UNIVERSAL MEDIA WORKS WITH MOST EVAPORATIVE COOLERS





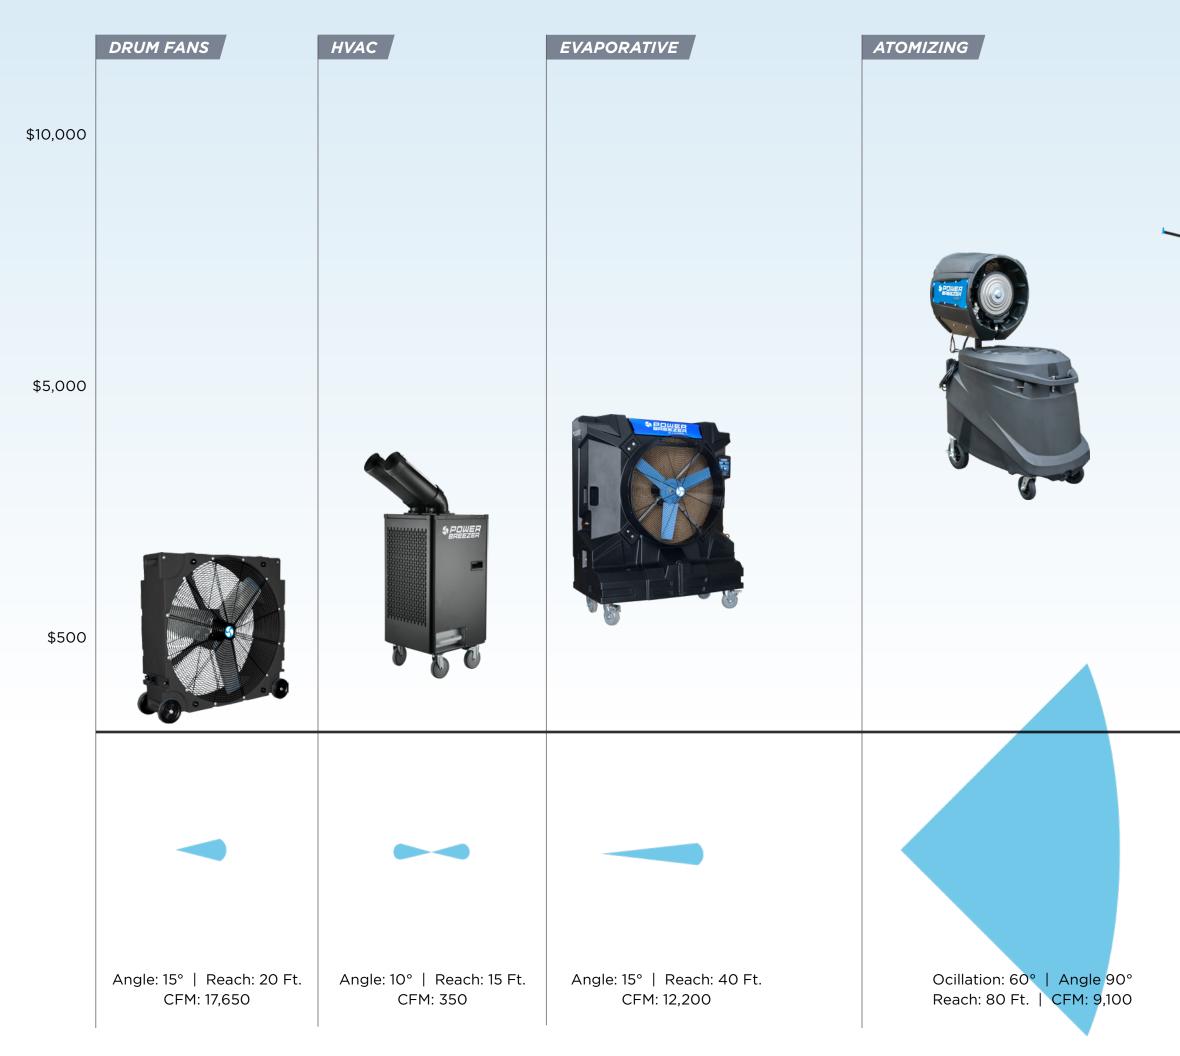

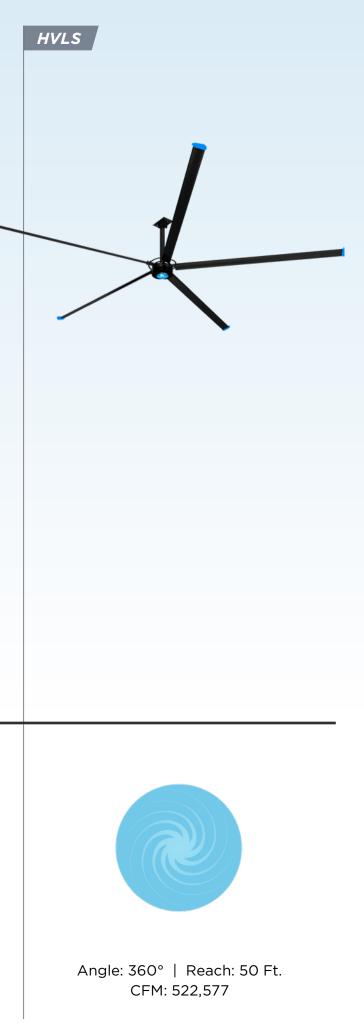

THE PINNACLE OF MOBILE ATOMIZED COOLING

POWER BREEZER M CLASS - The longest range and highest BTU portable cooling solution.



Choose Targeted Atomizing Cooling from Power Breezer!











THE LOWEST COST PERSONAL COOLING SOLUTIONS

POWER BREEZER H CLASS – Personal cooling for workers in stationary job roles.

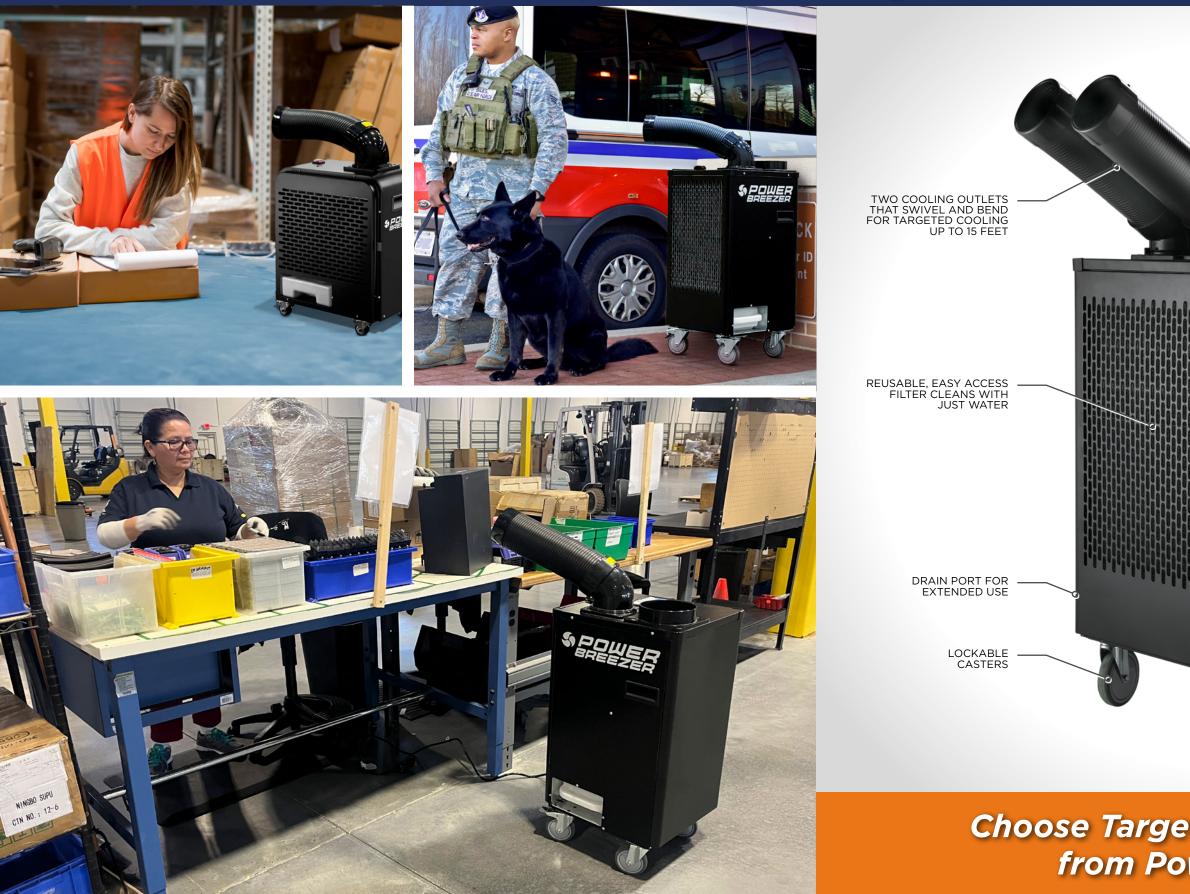




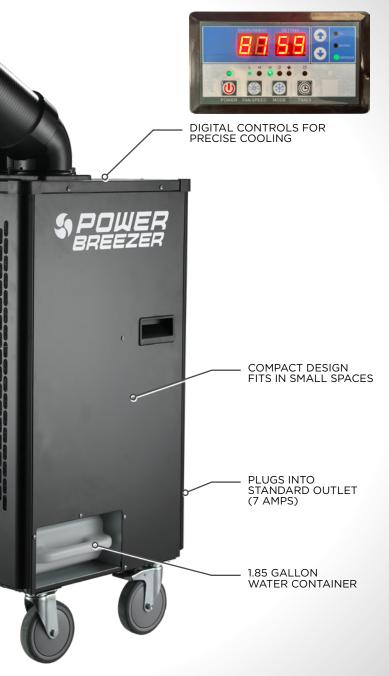

Choose Targeted HVAC Cooling from Power Breezer!

UNIQUE AREA COOLING & AIR MOVEMENT SOLUTIONS

POWER BREEZER C CLASS – HVLS ceiling fans engineered for safety and longevity.

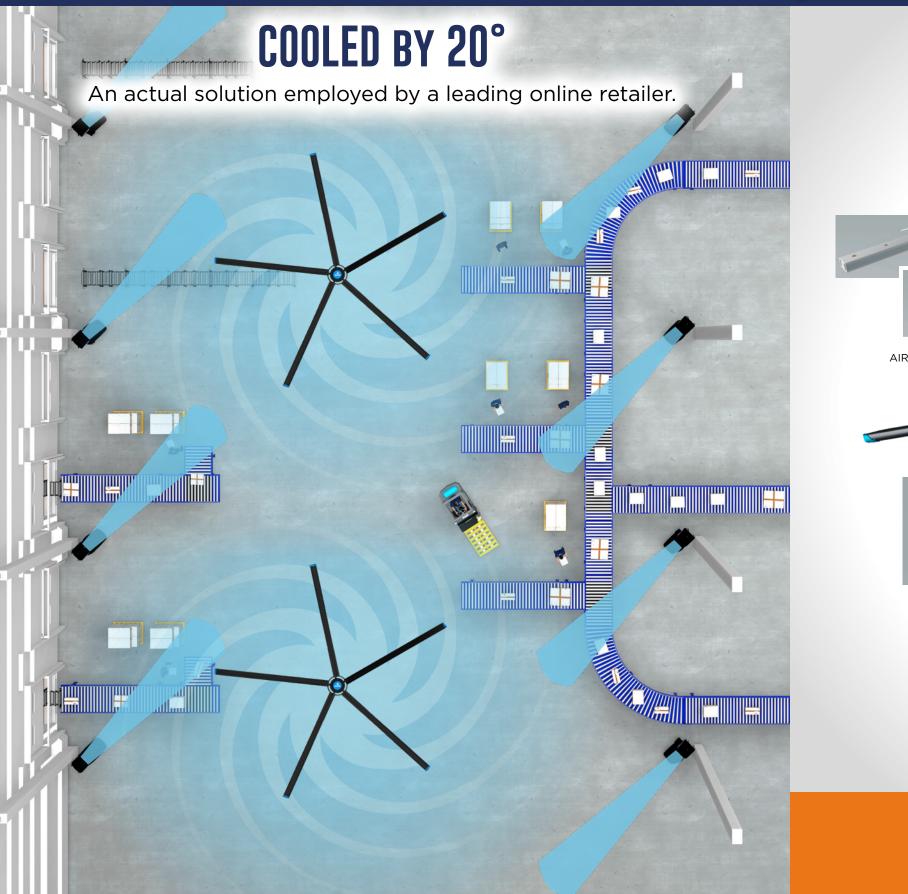



15% LIGHTER

STANDARD

PATENTED JACKETED FOIL ATTACHMENTS FOR 3X LONGER LIFE THAN

INDUSTRY STANDAR

PATENTED AIRFOIL FOR HIGHEST EFFICIENCY AIRFLOW



Choose Targeted HVLS Cooling from Power Breezer!



If portable, powerful air movers are what you are looking for then the Power Breezer F Class fans are the way to go. The F Class are rugged high powered mobile fans that will bring cooling to any work zone in your facility.

- Roto molded construction for durability
- Powerful aluminum fan blades
- Stackable design for easy shipping and storage

- Design allows multiple units to be joined
- 15 foot grounded power cord
- Four rubber wheels, for convenient transportation and positioning



If your environment includes workers in high tech positions that need personalized cooling, look no further than the Power Breezer H Class. The H Class is a line of portable, personal air conditioning systems that provide powerful, dry cooling for 1-3 individuals.

- Uses environmentally friendly R32 refrigerant
- No need to install: plug and play, portable and safe
- Safety features: overheating temperature and overload power-off protection







Model	F240S 819RX3	F300M 819RX4	F360L 819RX5	F420SL 819RX6
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
Fan Blade (In.)	24	30	36	42
Voltage	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Fan Motor	1/3hp	1/2hp	1/2hp	3/4hp
Air Volume (CFM)	8,850	12,350	14,150	17,650
Fan Speed (RPM)	1,100	1,100	730	720
Speeds	3	3	3	3
Measurements (In.)	27.4x10x28.5	32.7x10x33.7	38.6x12.2x39.8	43.3x14.6x44.9
Weight (Lbs.)	33.0	45.2	58.4	89.3





Model	H530M 822P24	H750L 822P25	H950SL 822P26
Warranty	<u> 3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
Power	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Air Volume (CFM)	135	235	350
EER	6.36	8.43	11.36
Cooling (Btu/h)	7,000	9,000	13,600
Measurements (In.)	18.5x11.5x24.3	16.0x16.9x33.9	16.9x19.4x37.9
Weight (Lbs.)	57.2	82.5	107.8
Condensate Tank (Gal.)	.79	1.32	1.85

- Adjustable swing and bending design of the air duct, no dead angle exhaust
- Control panel design prevents dust from entering
 - Large capacity condensate tank







Evaporative cooling provides high efficiency cooling in areas where things need to stay cool and dry. The Power Breezer E Class offers mobile long, running performance for your high concentration, machine driven work zones.

- Attractive compact design
- Wheeled units with integrated water tank for multiple applications
- Long uninterrupted running time before water refills

- Centrifugal fan
- Automatic water supply
- Eco-friendly: no compressor, no gas, very low consumption
- 8.2 foot grounded power cord








Model	E520M 819RX0	E780L 819RX1	E1220SL 819RX2
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u>3 Year Limited</u>
Fan Blade (In.)	18	24	36
Voltage	110-120V/60Hz	110-120V/60Hz	110-120V/60Hz
Fan Motor	1.1hp	.85hp	1.2hp
Air Volume (CFM)	5,200	7,800	12,200
Cooling Area (Sq. Ft.)	1,332	1,998	3,125
Tank Capacity (Gal.)	20	30	58
Speeds	3	3	3
Measurements. (In.)	35x21.3x45.7	43.4x23.4x53.2	57.3×27.6×69.9
Weight (Lbs.)	119.3	153.5	228.6
Evaporative Media	819RX7	819RX8	819RX9







Choose Targeted Evaporative Cooling from Power Breezer!

©2024 Maxify Solutions, Inc. All Rights Reserved. Power Breezer* is licensed under U.S. Patent No. 6,789,787. CLASS_2411.10_MRO-CAT_GR



The Power Breezer M Class is the pinnacle of mobile cooling solutions. Built rugged, these atomizing cooling machines oscillate up to 60 degrees providing a massive cone of cooling for your high concentration work zones.

- Durable portable design can be used in hard to cool indoor and outdoor areas.
- Easy 2-minute set-up just add water and turn on.
- No filters, nozzles or hose connections results in cleaner air, lower costs, and minimal maintenance.
- Atomized water cools a large area without getting people or equipment wet.



Power Breezer C Class units provide ceiling mounted, high volume cooling for your high traffic work areas. Keep air flowing and productivity high with this zero footprint, ceiling mounted powerhouse.

- PMSM (Permanent Magnet Synchronous Motor) drive motor for slimmer design, reduced weight and double-bearing transmission is completely sealed, making the motor truly maintenance-free
- 5 contoured aluminum airfoils







Model	PB4BASE 788N80	PB4MAX 788N81	PB4TITAN 788N79
Warranty	<u>3 Year Limited</u>	<u>3 Year Limited</u>	<u> 3 Year Limited</u>
Cooling Capacity	30,800 Btu/h	65,600 Btu/h	126,500 Btu/h
Wind Range	Up to 65 feet	Up to 100 feet	Up to 100 feet
Air Volume (CFM)	7,800	9,100	9,100
Power Source / Plug Type	110 V / B	110 V / B	110-220 V Universal / B, G or I
Water Consumption	Up to 4 Gallons/Hour	Up to 8 Gallons/Hour	Up to 15 Gallons/Hour
Tank Capacity (Gal.)	85	85	85
Oscillation	Yes	Yes	Yes
Measurements (In.)	Stored: H: 46.92" W: 29.64" Mounted: H: 73.52" W: 29.64"	D: 45.38" D: 53.96"	
Weight* (Lbs.)	240	240	240
NSN	4120-01-612-8300		4140-01-624-3989



Model	C160S	C180M	C200L	C240SL
Warranty	<u> 3 Year Limited</u>	<u>3 Year Limited</u>	3 Year Limited	<u>3 Year Limited</u>
Diameter (Ft.)	16	18	20	24
Input Power	1.0kW	1.0kW	1.1kW	1.5kW
Full Load Current	4.0Amps/200V	4.2Amps/220V	4.4Amps/220V	4.9Amps/220V
Air Volume (CFM)*	406,119	431,039	455,960	522,577
Max Fan Speed (RPM)	75	65	60	56
Body Weight (Lbs.)**	253.5	264.6	284.4	297.6

*CFM values of HVLS fans are influenced by various factors such as ceiling height, room shape, obstructions, and other environmental conditions. **Weight calculation: The main body weight does not include the control box, extension rods, top connecting parts, etc.

©2024 Maxify Solutions, Inc. All Rights Reserved. Power Breezer* is licensed under U.S. Patent No. 6,789,787. CLASS_2411.10_MRO-CAT_GR

- Digital wall controller with status interface
- Durable construction for long-lasting performance
- Low noise operation



SOUND DAMPENER

Our unique sound dampener attaches to the back of the Power Breezer Mach 4 fan head.

- Easily attaches on both the mobile and fixed units manufactured in 2020+
- Reduces sound by up to 16dB

MODEL NAME PB4BASE, PB4N PB4TITAN	MAX,
MODELS BEGINNING WITH THE SERIAL NUMBERS PB-6004 and PI	B-6006



MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PAF NUI
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	60 140
52F0 and PB-6003	MARK 2, MARK 3	60
		* -



HAIR GUARD

Add additional protection to your Power Breezer.

- Prevents hair and other foreign objects from entering the fan head components
- Durable, waterproof material provides years of reliable protection
- Attaches with included zip ties and can be easily installed in minutes

POWER BREEZER	PART
MODELS	NUMBER
, PB4MAX, PB4TITAN	600-030-A



FLEXIBLE DUCTING KIT

- Our unique one-piece ducting kit attaches onto the Power Breezer's head.
- Adaptable solution for a wide range of cooling needs
- Cools for a fraction of the cost of HVAC
- Portable with minimal footprint

Color	Black
Extended Size	12 ft length. 29 in. dia. (73.7 cm) at fan end 20 in. dia. (50.8 cm) at duct end
Weight	11.6 lbs. (5.26 kg)
Fabric Weight	13oz.yd ² (441g/m ²)
Temperature Rating	-20° to 180° F (-29° to 82° C)



00-070 0-600-096-A*

- 00-039-A
- *Berry Compliant



COLLAPSES FOR STORAGE





HEAD SLEEVES

- Make your Power Breezer a revenue generator with ad space
- Increase brand recognition
- Attract customers and attention
- Made with long-lasting, wrinkle and fade resistant stretch nylon for repeated use
- Easily installs and removes in seconds



MODELS BEGINNING WITH THE SERIAL NUMBERS	MODEL NAME	PART NUMBER
PB-6004 and PB-6006	PB4BASE, PB4MAX, PB4TITAN	600-065-A
52F0 and PB-6003	Mark 2, Mark 3	600-014-A
5278	02	500-081-A

ATOMIZER GUARD

Add additional protection to your Power Breezer.

- Proprietary protective design prevents touching of atomizer disk
- Durable, waterproof material provides years of reliable protection
- Attaches easily with included fasteners (4) and spacers (4)

MODELS BEGINNING WITH THE SERIAL NUMBER	MODEL NAME	PART NUMBER
PB-6006	PB4BASE, PB4MAX, PB4TITAN	180-900-670

POPULAR PARTS

HVLS CEILING F	ANS	
DESCRIPTION	PART NUMBER	MODELS
Fan Motor	580-200-001-A	C160S,
Control Module	580-200-002-A	C180M, C200L, C240SL

ATOMIZING COOLERS DESCRIPTION PART NUMBER MODELS PB4BASE, Water Pump Kit 150-600-081 PB4MAX Drain Plug 140-400-265-A PB4TITAN Front Casters 400-253-A Rear Wheels 400-002 Atomizer Assy. 140-900-600-A 140-200-206 Atomizer Motor 140-700-300-В Rotation Assy. 200-158-B CS Rotation Motor Control Panel 140-600-031 Power Cord 202-055-C Fan Motor 150-200-213-A Head Handles 140-600-084-B

EVAPORATIVE	COOLERS


DESCRIPTION	PART NUMBER	MODELS
Control Pad (same for all models)	520-200-021-A	E520M, E780L, E1220SL
Water Pump	520-200-018-A 520-200-019-A 520-200-020-A	E520M, E780L, E1220SL
Evaporative Media	819RX7 819RX8 819RX9	E520M, E780L, E1220SL
Fan Motor	520-200-015-A 520-200-016-A 520-200-017-A	E520M, E780L, E1220SL

DESCRIPTION	PART NUMBER	MODELS
Enclosure	560-300-008-A 560-300-023-A 560-300-037-A	H530M H750L H950SL
Indoor Temp. Sensor	560-200-014-A 560-200-029-A	H750L H950SL
Evap. Temp. Sensor	560-200-015-A 560-200-030-A	H750L H950SL
Outlet Temp. Sensor	560-200-016-A 560-200-031-A	H750L H950SL
DRUM FANS		
DESCRIPTION	PART NUMBER	MODELS
Fan Motor	540-200-007-A 540-200-008-A 540-200-009-A 540-200-010-A	F240S, F300M, F360L, F420SL
Power Cord (same for all models)	540-200-011-A	F240S, F300M, F360L, F420SL
Switch (same for all models)	540-200-012-A	F240S, F300M, F360L, F420SL
Switch Knob (same for all models)	540-100-005-A	F240S, F300M, F360L, F420SL
Wheels (4) (same for all models)	540-300-022-A	F240S, F300M, F360L, F420SL


UNIVERSAL EVAPORATIVE MEDIA		
DESCRIPTION	PART NUMBER	
60"H x 12"W x 6"D	819RY4	
48"H x 12"W x 6"D	819RY3	
36"H x 12"W x 6"D	819RY2	
24"H x 11"W x 4"D	819RY1	
19"H x 11"W x 4"D	819RY0	




AT 95°F YOUR LABOR COSTS DOUBLE




Resource Productivity vs. Heat



Injury Cost Baseline and Heat Injury Cost



Summer Turnover Compared to Office Workers






Replacing employees costs 15-25% of the their annual pay, when it is hot attrition doubles.









per employee/month 6 work hours/month

per employee/month 66 work hours/month When it is 90°F the cost of quality doubles to 4% of revenue

per employee/month 75 work hours/month

When it is 95°F

there is a 45% productivity loss.

When it is hot, people are injured twice as often.



Source: NASA

Source: NASA

